


DATENBLATT / TECHNICAL DATA SHEET B12

Sicherheitsventil / Safety valve / soupape de sécurité

Erstellt / made / établis : 09.03.2017

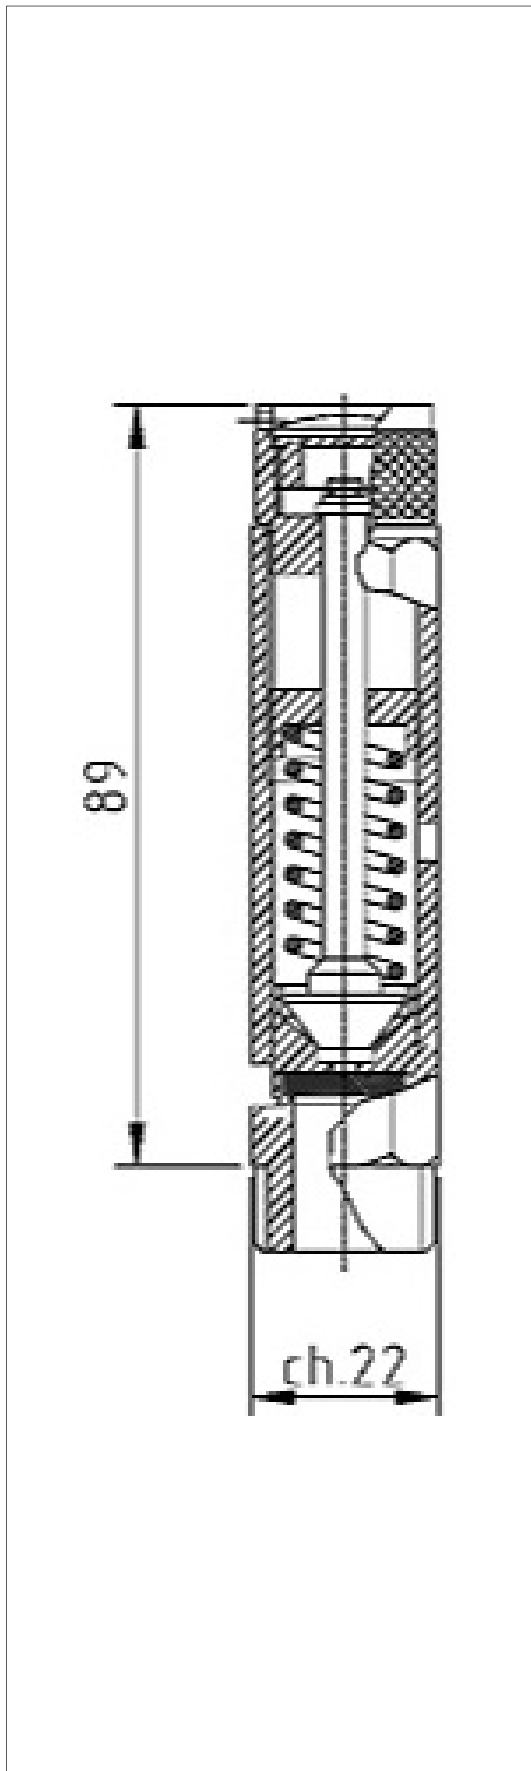

Geeignet für
Adapted for
Convenant pour



Luft und neutrale Gase / air + neutral gases

Zulassung
Homologation
homologation

CE DGR EN ISO 4126 -1 entsprechend AD 2000
ASME VIII Div.I, CRN, EAC, ATEX Ex II 2 G c

Anschlüsse
connections
connexion

1/2"-M
GAS ISO228 – BSPT – NPT – ISO7 R EN10226

Nennweite D0
nominal Size
diametres nominal

12 mm

Druckbereich
pressure range
plage de pression

0,3 bar – 30,0 bar (1 – 30,0 bar ASME)

Werkstoffe
material
matériau

Messing / brass / laiton

Dichtungen
gaskets
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM

Temperatur
temperature
température

-196°C – 250°C

k-Faktor

0,75 (0,712 ASME)

Gewicht
weight

0,24 kg