


DATENBLATT / TECHNICAL DATA SHEET E5/LS

Eck-Sicherheitsventil / Safety valve angle type / soupape de sécurité canalisé

Seite 1

Erstellt / made / établir : 01.03.2017

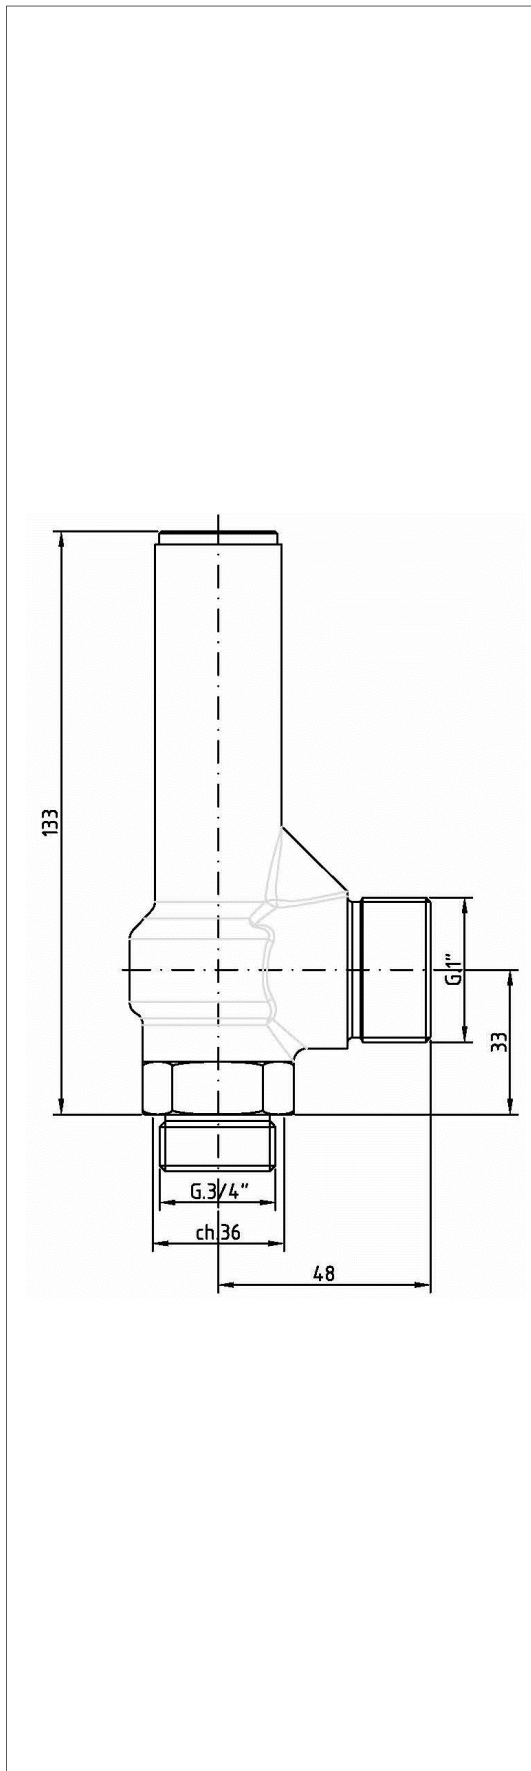

Geeignet für
Adapted for



Luft, neutrale Gase, Flüssigkeiten, giftige, brennbare Medien, Kühl-Kältemittel
Air, liquids, toxic and flammable fluids

Zulassung
homologation
homologation

CE E.D. 97/23/EC IV Cat.(PED) +
ATEX Ex II 2 G c / D c

Anschlüsse
connections
connexion

IN: 1/2"-M + 3/4"-M + 1"-M G ISO228, NPT, R EN10226
OUT: 1"-M G ISO228

Nennweite D0
nominal Size
diametres nominal

5 mm

Druckbereich
pressure range
plage de pression

100,0 bar – 300,0 bar / PN700

Werkstoffe
material
matériau

Edelstahl / stainless steel / Inox
Messing / brass / laiton

Dichtungen
gaskets
joint

PEEK, VESPEL

Temperatur
temperature
température

-196°C – 250°C

k-Faktor

0,828

Gewicht
weight

0,8 kg