


DATENBLATT / TECHNICAL DATA SHEET F18/S/P

Sicherheitsventil / Safety valve / soupape de sécurité

Erstellt / made / établir : 02.01.2016

Seite 1

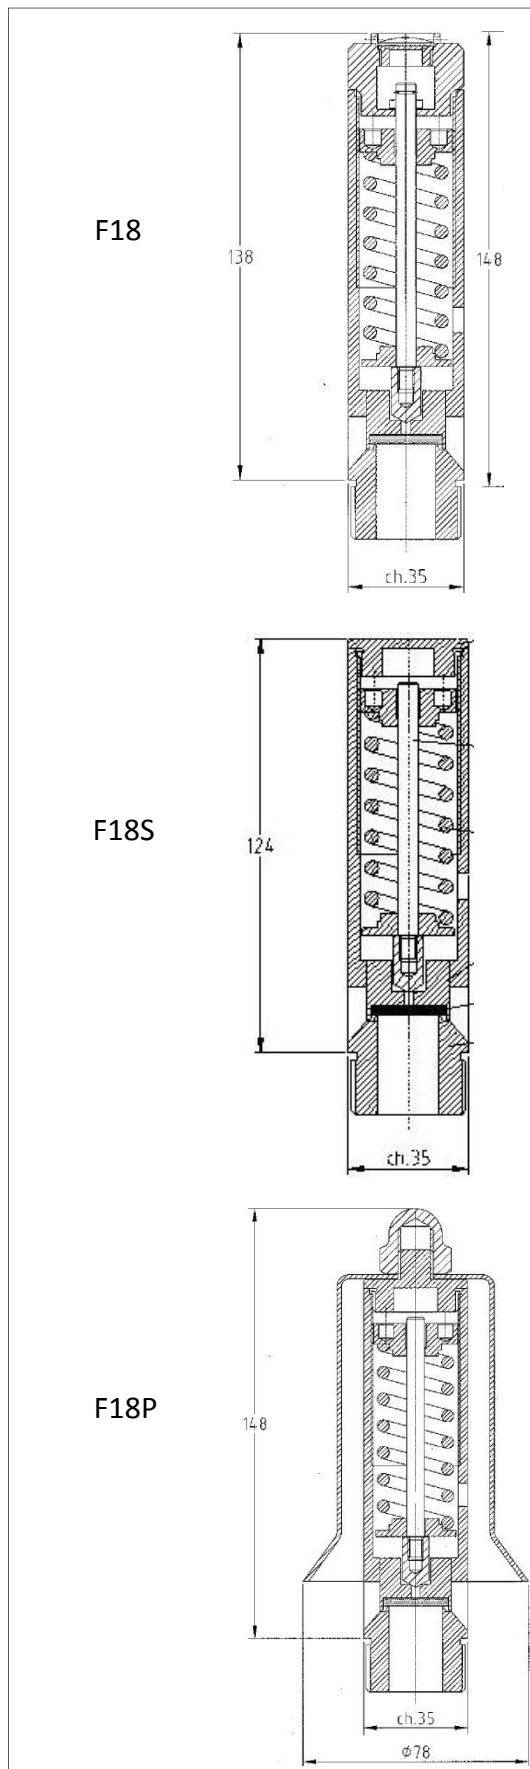

Geeignet für
Adapted for
Convenant pour



Luft und neutrale Gase / air + neutral gases

Zulassung
Homologation
homologation



DGR EN ISO 4126 -1 entsprechend AD 2000
ASME, CRN, EAC, ATEX

Anschlüsse
connections
connexion

1"-M
GAS ISO228 – BSPT – NPT – ISO7 R EN10226

Nennweite D0
nominal Size
diametres nominal

18 mm

Druckbereich
pressure range
plage de pression

0,3 bar – 21,0 bar (1 – 21,0 bar ASME)

Werkstoffe
material
matériau

Messing / brass / laiton

Dichtungen
gaskets
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM

Temperatur
temperature
température

-196°C – 250°C

k-Faktor

0,74 / >=3 bar 0,84 (0,712 ASME)

Gewicht
weight

0,75 kg F18 / 0,68 kg F18S / 0,75 kg F18P