


DATENBLATT / TECHNICAL DATA SHEET F25/S/P

Frei abblasendes Sicherheitsventil / Safety valve / soupape de sécurité

Erstellt / made / établis : 02.01.2016

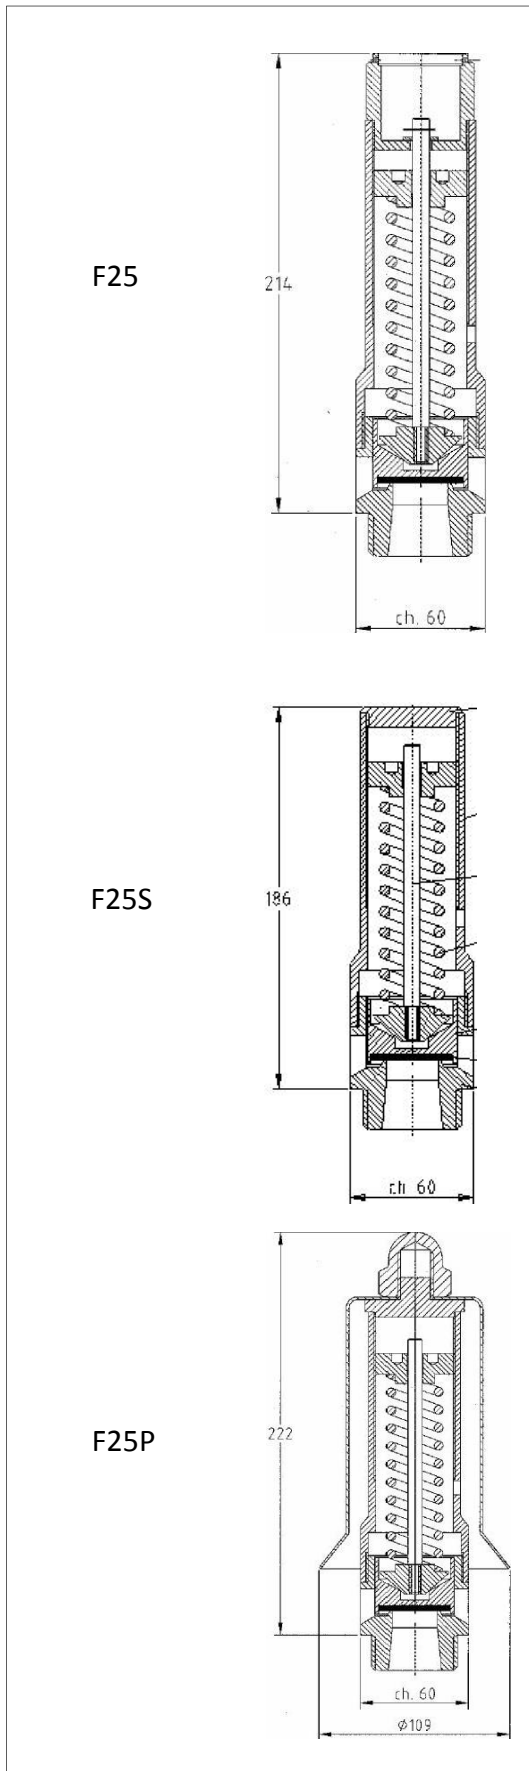

Geeignet für
Adapted for
Convenant pour



Zulassung
homologation
homologation

CE DGR EN ISO 4126
ASME VIII Div.I, CRN, EAC, ATEX

Anschlüsse
connections
connexion

11/4" – M, 11/2"-M G ISO228 – BSPT – NPT –
ISO7 R EN10226 , DN32-40 PN16-40 , 11/4"-11/2" 150-300 lb
11/2" Tri Clamp , DN25-32-40 DIN405 -11851

Nennweite D0
nominal Size
diametres nominal

25 mm

Druckbereich
pressure range
plage de pression

0,3 bar – 30,0 bar (ASME 1,0 – 30,0 bar)

Werkstoffe
material
matériau

Messing / brass / laiton
Edelstahl / stainless steel / Inox

Dichtungen
gaskets
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM

Temperatur
temperature
température

-196°C – 450°C

k-Faktor

0,86 0,712 ASME

Gewicht
weight

2,03 kg F25 / 2 kg F25S / 2,37 kg F25P