


DATENBLATT / TECHNICAL DATA SHEET F32/S/P

Frei abblasendes Sicherheitsventil / Safety valve / soupape de sécurité

Erstellt / made / établi : 02.01.2016

Seite 1

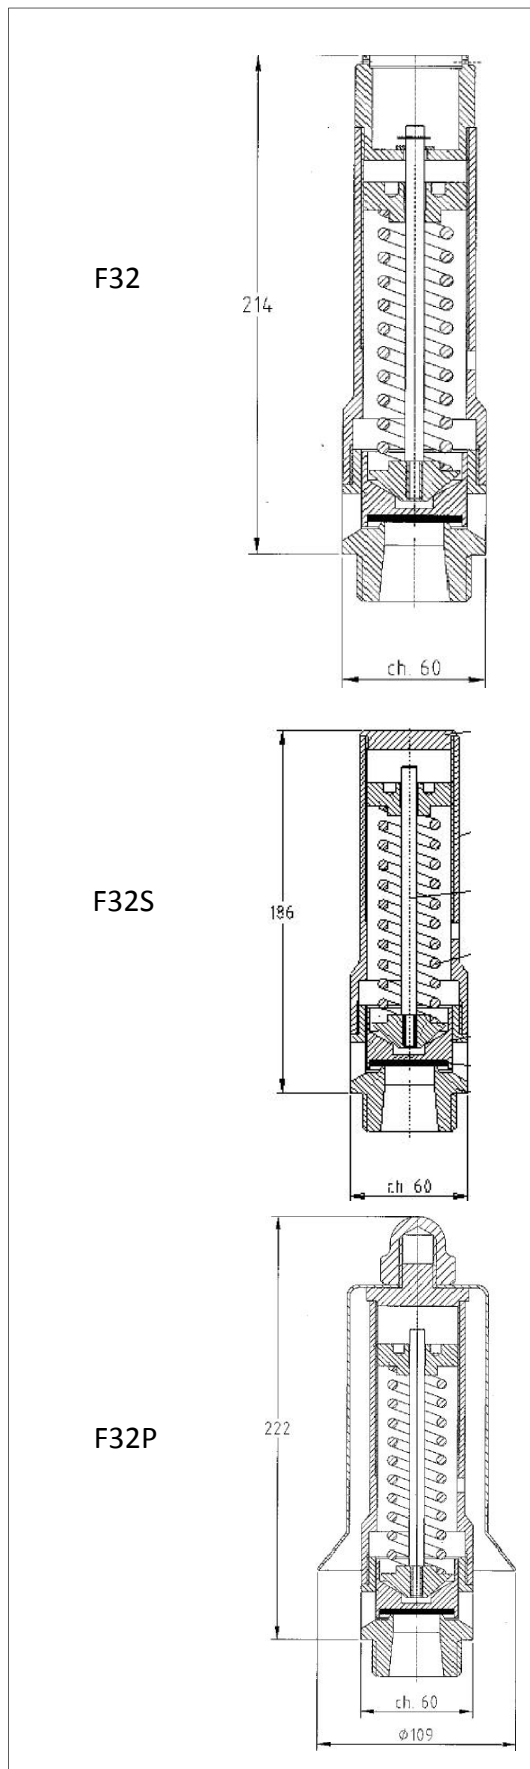

Geeignet für
Adapted for
Convenant pour



Zulassung
homologation
homologation

CE DGR EN ISO 4126
ASME VIII Div.I, CRN, EAC, ATEX Ex II 2 G c

Anschlüsse
connections
connexion

11/2"-M GISO228 – BSPT – NPT – ISO7 R EN10226
DN40 PN16-40 , 11/2"-2" Tri Clamp ,
DN32-32-40 DIN405-11851 , 11/2" 150-300 lb

Nennweite D0
nominal Size
diametres nominal

32 mm

Druckbereich
pressure range
plage de pression

0,3 bar – 14,0 bar (ASME 1,0 – 12,2 bar)

Werkstoffe
material
matériau

Messing / brass / laiton
Edelstahl / stainless steel / Inox

Dichtungen
gaskets
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM / Metall

Temperatur
temperature
température

-196°C – 450°C

k-Faktor

0,78 / 0,712 ASME

Gewicht
weight

2,5 kg