


**DATENBLATT / TECHNICAL DATA SHEET F40/S/P**

Frei abblasendes Sicherheitsventil / Safety valve / soupape de sécurité

Erstellt / made / établi : 02.01.2016

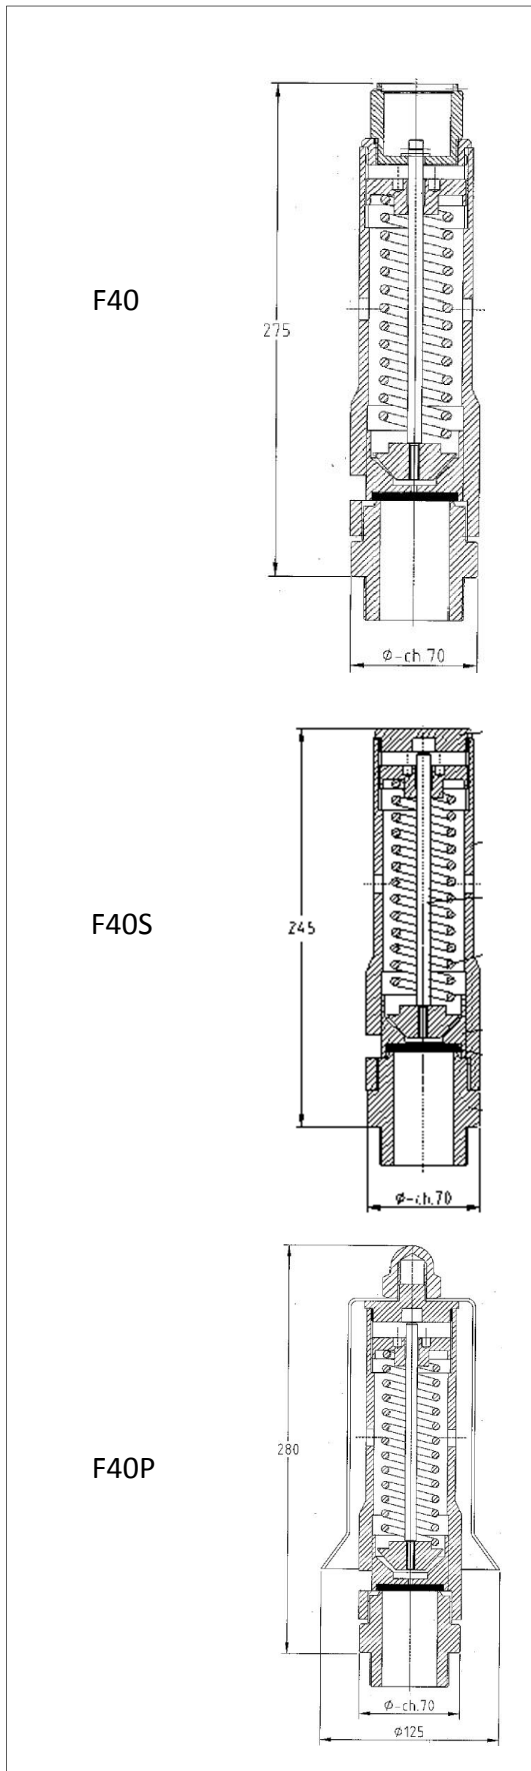

**Geeignet für**  
Adapted for  
Convenant pour

Luft, air

**Zulassung**  
homologation  
homologation

**CE** DGR EN ISO 4126  
ASME VIII Div.I, CRN, EAC, ATEX Ex II 2 G c

**Anschlüsse**  
connections  
connexion

1 1/2"-M, 2"-M G ISO228 – BSPT – NPT – ISO7 R EN10226  
DN40-50 PN16-40 , 1"-21/2" 150-300 lb , 2" Tri Clamp  
DN40-50 DIN405-11851

**Nennweite D0**  
nominal Size  
diametres nominal

40 mm

**Druckbereich**  
pressure range  
plage de pression

0,3 bar – 30,0 bar (ASME 1,0 – 30,0 bar)

**Werkstoffe**  
material  
matériau

Messing / brass / laiton  
Edelstahl / stainless steel / Inox

**Dichtungen**  
gaskets  
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM / Metall

**Temperatur**  
temperature  
température

-196°C – 450°C

**k-Faktor**

0,59 (>=3 bar 0,69) / 0,712 ASME

**Gewicht**  
weight

3,97 kg F40 / 3,65 kg F40S / 4,4 kg F40P