


DATENBLATT / TECHNICAL DATA SHEET TA7

Frei abblasendes Sicherheitsventil / Safety valve

Erstellt / made / établir : 20.06.2017

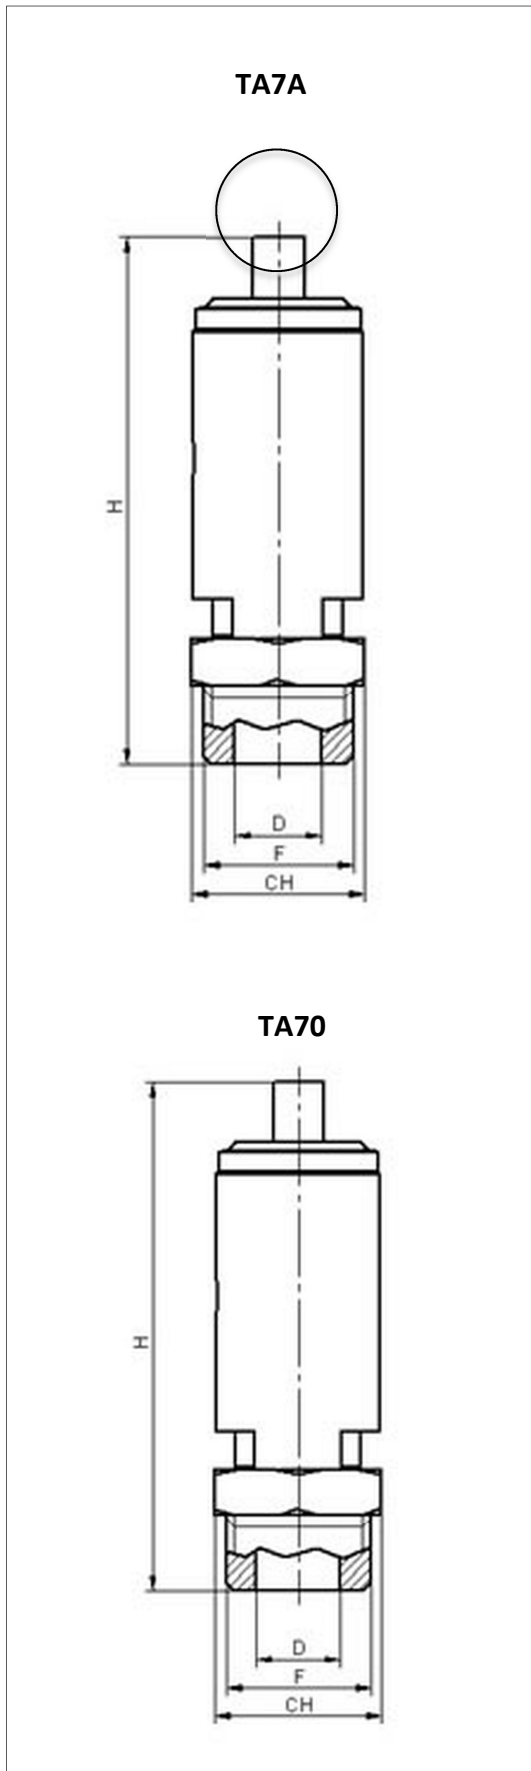

Geeignet für
Adapted for
Convenant pour



Luft
air
air

Zulassung
homologation
homologation

CE DGR EN ISO 4126 -1 entsprechend AD 2000

Anschlüsse
connections
connexion

1/8"-M, 1/4"-M, 3/8"-M
BSP – BSPT - NPT

Nennweite D
nominal Size
diametres nominal

7 mm

Druckbereich
pressure range
plage de pression

0,5 bar – 18,0 bar

Werkstoffe
material
matériau

Messing / brass / laiton
Edelstahl / stainless steel / Inox

Dichtungen
gaskets
joint

NBR / FKM (Viton)

Temperatur
temperature
température

-10°C – 200°C

k-Faktor

0,7

Abmessungen | dimension | dimension

G	SW (CH) mm	H mm 0,5 – 18bar	
1/8"-1/4"	15	43	
3/8"	17	48	

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur