


DATENBLATT / TECHNICAL DATA SHEET TW1

Frei abblasendes Sicherheitsventil / Safety valve

Erstellt / made / établi : 02.01.2016

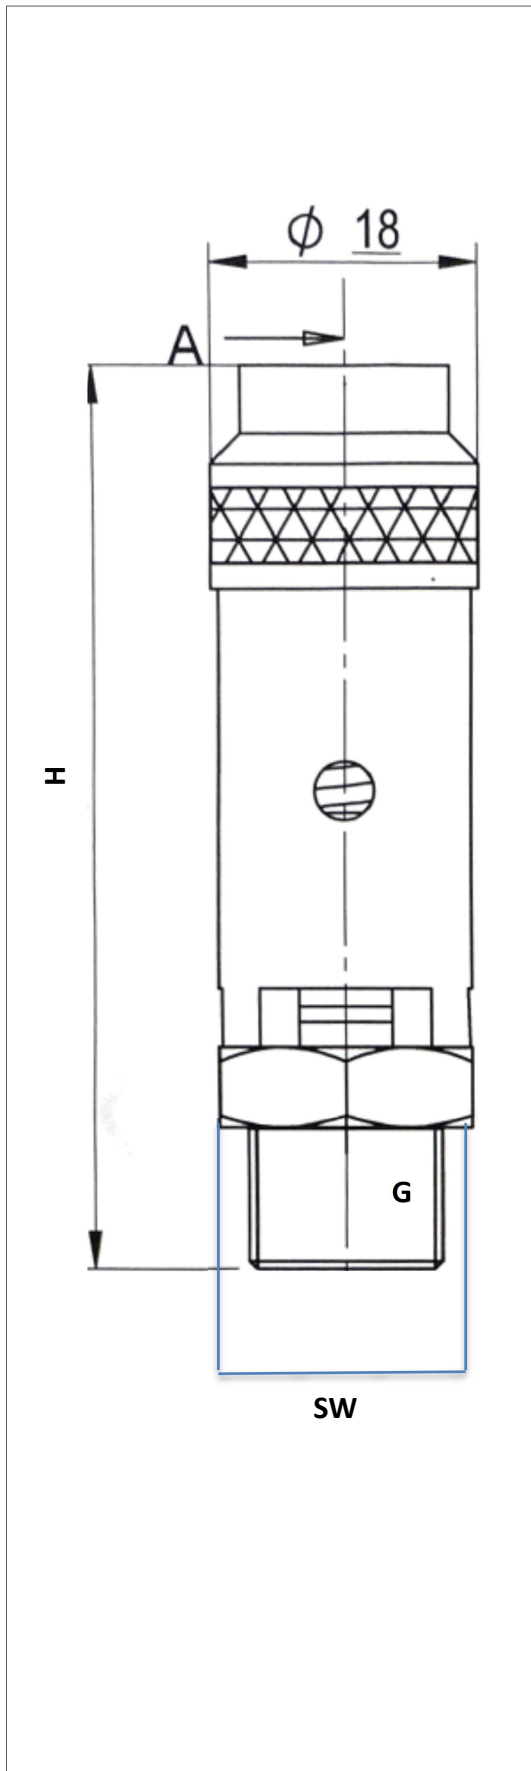

Geeignet für
Adapted for
Convenant pour



Luft
air
air

Zulassung
homologation
homologation



DGR EN ISO 4126 -1 entsprechend AD 2000

Anschlüsse G
connections
connexion

1/4"-M , 3/8"-M, 1/2"-M
BSP – BSPT - NPT

Nennweite
nominal Size
diametres nominal

7 mm

Druckbereich
pressure range
plage de pression

0,5 bar – 45,0 bar

Werkstoffe
material
matériau

Messing / brass / laiton
Edelstahl / stainless steel / Inox

Dichtungen
gaskets
joint

NBR(-20+80°C) / FKM(-20+200°C) / Silicon(-30+160°C) /
PTFE(-40+230°C) / EPDM(-40+130°C) / FFKM(-10+260°C)

Temperatur
temperature
température

-40°C – 260°C

k-Faktor

0,82

Abmessungen | dimension | dimension

G	SW (CH) mm	H mm 0,5 – 16bar	H mm 16,1 – 45,0 bar
1/4"	17	62	67
3/8"	20	64	69
1/2"	22	66	71

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur