


**DATENBLATT / TECHNICAL DATA SHEET TW3**

Frei abblasendes Sicherheitsventil / Safety valve

Erstellt / made / établis : 02.01.2016

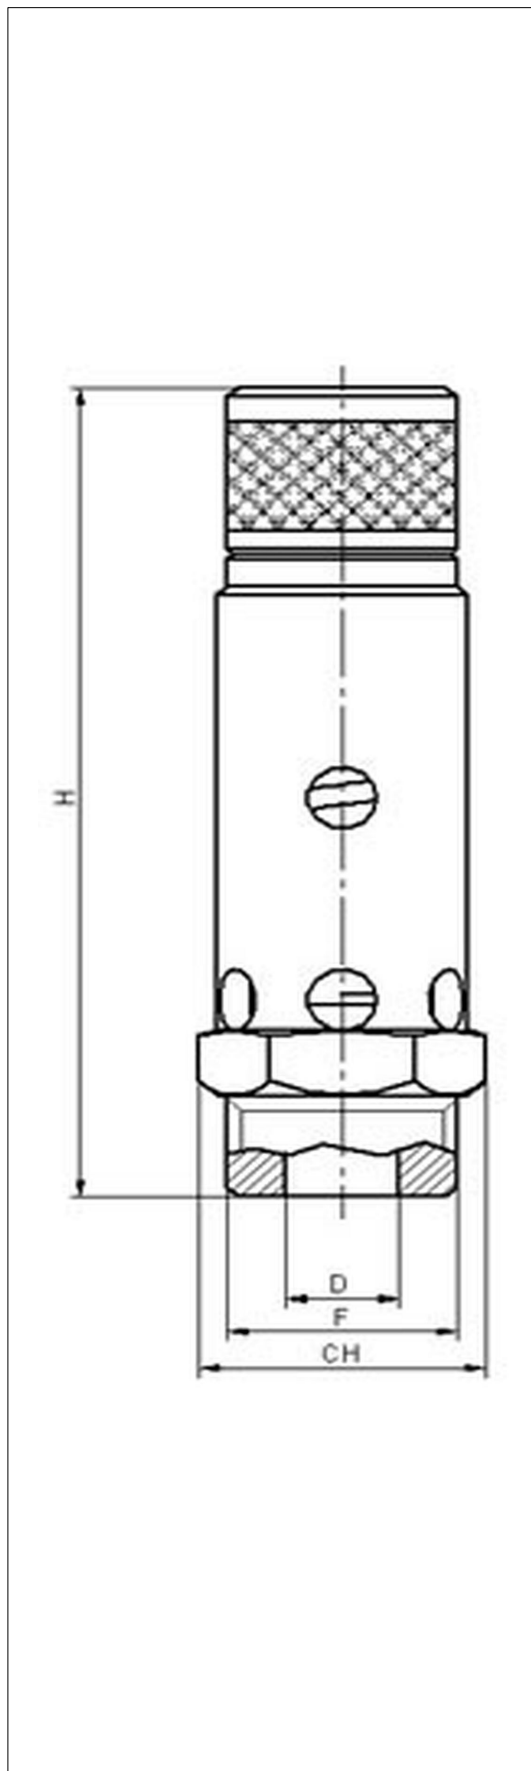

**Geeignet für**  
Adapted for  
Convenant pour



Luft  
air  
air

**Zulassung**  
homologation  
homologation



DGR EN ISO 4126 -1 entsprechend AD 2000

**Anschlüsse**  
connections  
connexion

3/8"-M, 1/2"-M, 3/4"-M  
BSP – BSPT - NPT

**Nennweite D**  
nominal Size  
diametres nominal

10 mm

**Druckbereich**  
pressure range  
plage de pression

0,5 bar – 45,0 bar

**Werkstoffe**  
material  
matériau

Messing / brass / laiton  
Edelstahl / stainless steel / Inox

**Dichtungen**  
gaskets  
joint

NBR(-20+80°C) / FKM(-20+200°C) / Silicon(-30+160°C) /  
PTFE(-40+230°C) / EPDM(-40+130°C) / FFKM(-10+260°C)

**Temperatur**  
temperature  
température

-40°C – 260°C

**k-Faktor**

0,82

**Abmessungen | dimension | dimension**

G	SW (CH) mm	H mm 0,5 – 16bar	H mm 16,1 – 45,0 bar
3/8"	22	76	95
1/2"	22	77	96
3/4"	28	81	100

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur