


DATENBLATT / TECHNICAL DATA SHEET TW3C

Eck-Sicherheitsventil / Safety valve angle type / soupape de sécurité canalisé

Erstellt / made / établis : 02.01.2016

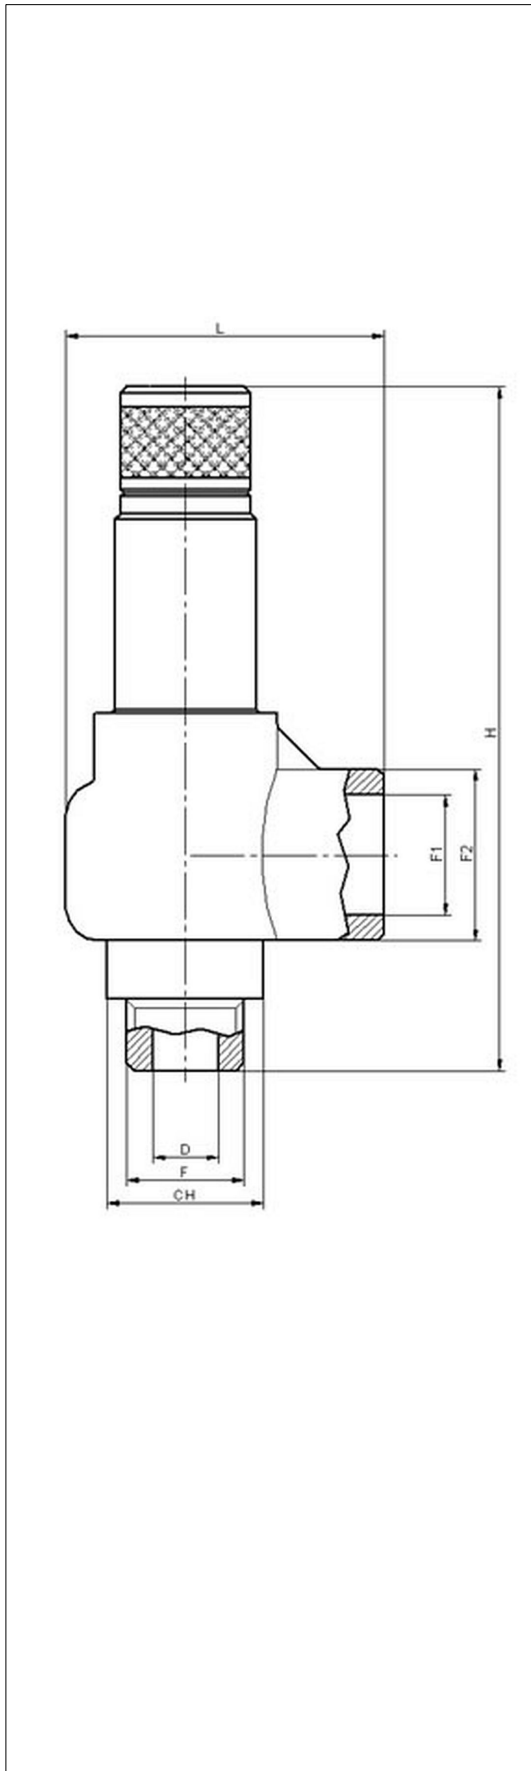

Geeignet für
Adapted for
Convenant pour



Luft und neutral Gase / air and neutral gases

Zulassung
homologation
homologation



DGR EN ISO 4126 -1 entsprechend AD 2000

Anschlüsse
connections
connexion

3/8"-M, 1/2"-M, 3/4"-M x G1/2-F, G3/4-M
BSP – BSPT - NPT

Nennweite D
nominal Size
diametres nominal

10 mm

Druckbereich
pressure range
plage de pression

0,5 bar – 45,0 bar

Werkstoffe
material
matériau

Messing / brass / laiton

Dichtungen
gaskets
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM

Temperatur
temperature
température

-40°C – 260°C

k-Faktor

0,82

Abmessungen | dimension | dimension

F	F2	SW (CH) mm	H mm 0,5 – 16bar	H mm 16,1 – 45,0 bar
3/8"-M	3/4"-M	24	90	109
1/2"-M	3/4"-M	24	91	110
3/4"-M	3/4"-M	28	95	114

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur