


**DATENBLATT / TECHNICAL DATA SHEET TW5C**

Eck-Sicherheitsventil / Safety valve angle type / soupape de sécurité canalisé

Erstellt / made / établis : 02.01.2016

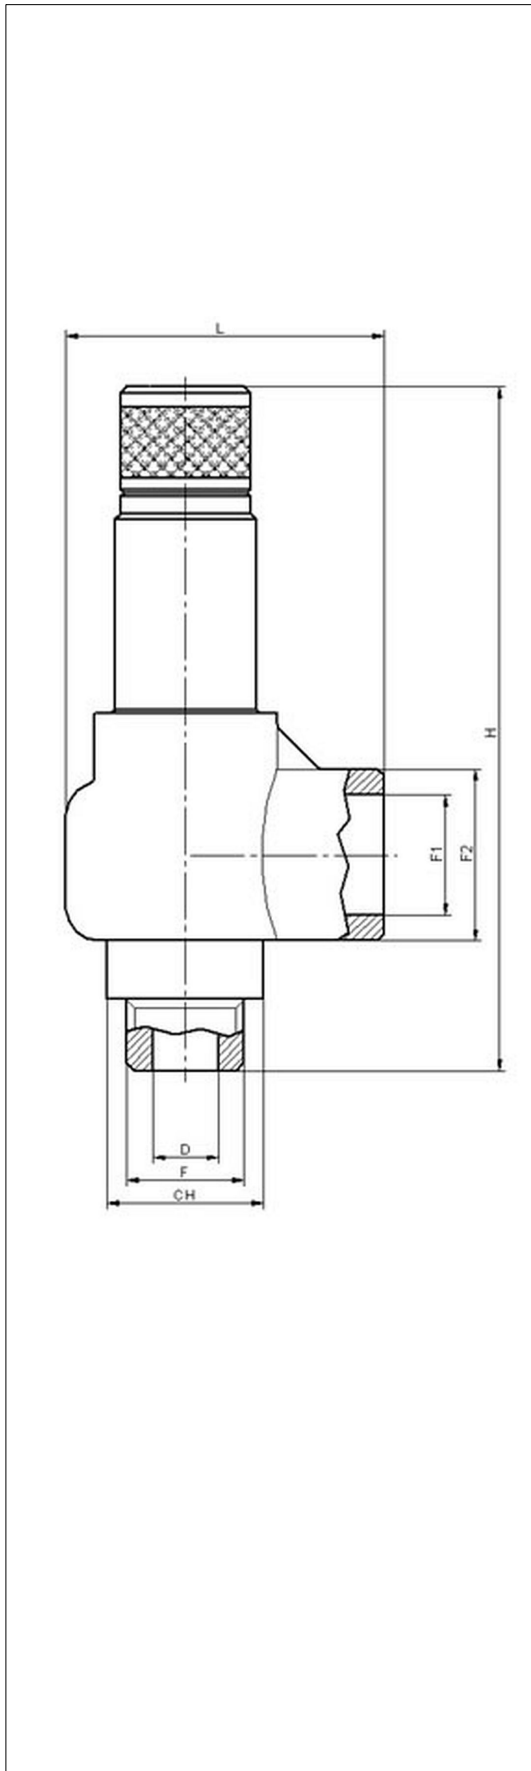

**Geeignet für**  
Adapted for  
Convenant pour



Luft und neutral Gase / air and neutral gases

**Zulassung**  
homologation  
homologation



DGR EN ISO 4126 -1 entsprechend AD 2000

**Anschlüsse**  
connections  
connexion

1/2"-M, 3/4"-M, 1"-M x G1"-M  
BSP – BSPT - NPT

**Nennweite D**  
nominal Size  
diametres nominal

14 mm

**Druckbereich**  
pressure range  
plage de pression

0,5 bar – 45,0 bar

**Werkstoffe**  
material  
matériau

Messing / brass / laiton

**Dichtungen**  
gaskets  
joint

NBR / FKM / Silicon / PTFE / EPDM / FFKM

**Temperatur**  
temperature  
température

-40°C – 260°C

**k-Faktor**

0,81

**Abmessungen | dimension | dimension**

F	F2	SW (CH) mm	H mm 0,5 – 16bar	H mm 16,1 – 45,0 bar
1/2"-M	1"-M	30	119	161
3/4"-M	1"-M	30	121	163
1"-M	1"-M	38	123	165

SW Schlüsselweite / wrench size / surplat

H Länge / length / longueur